
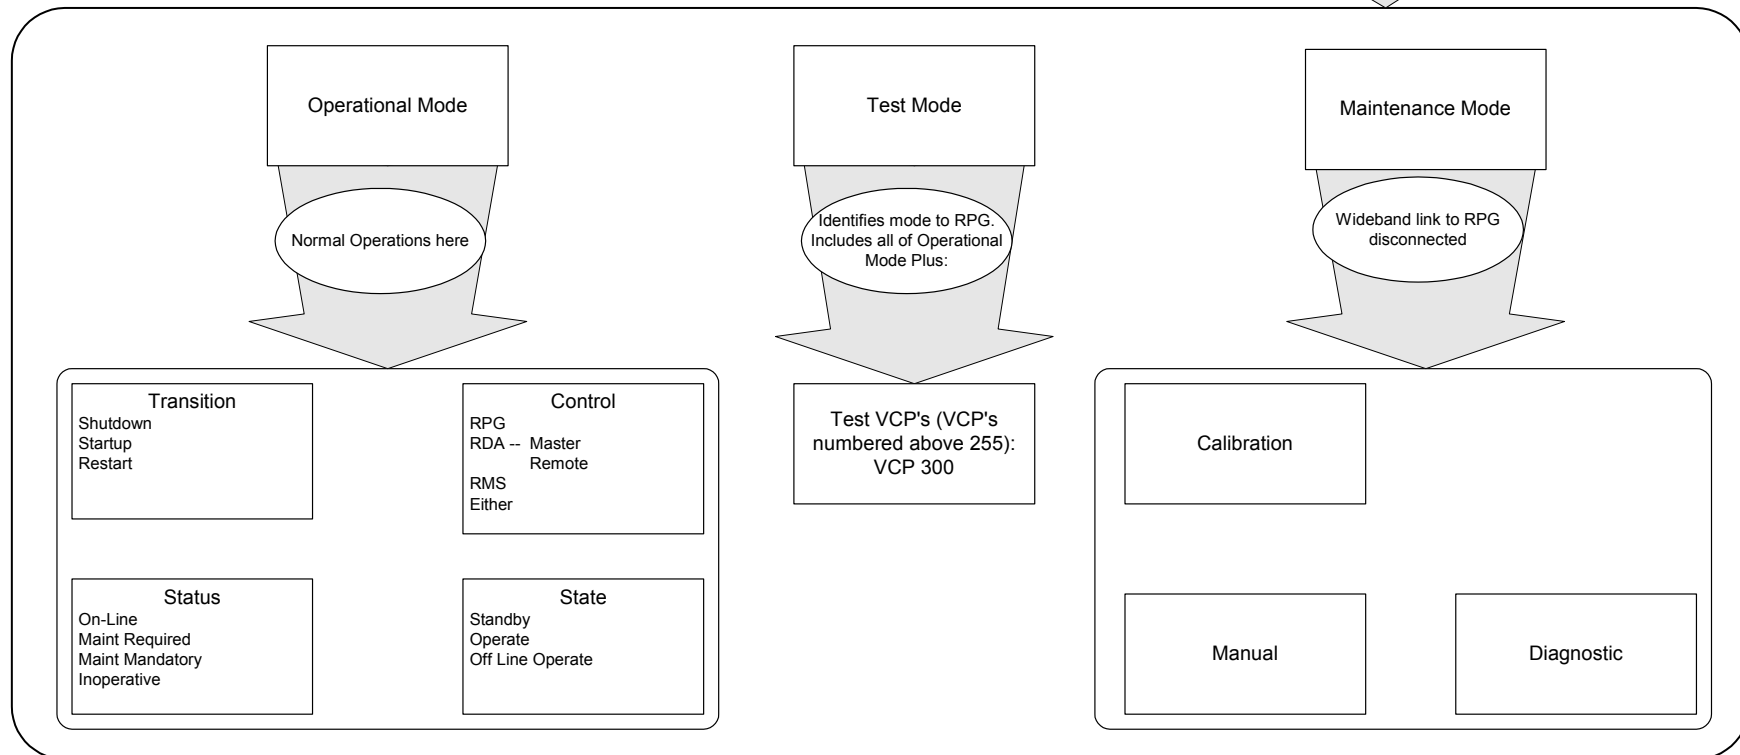


ORDA States and Modes

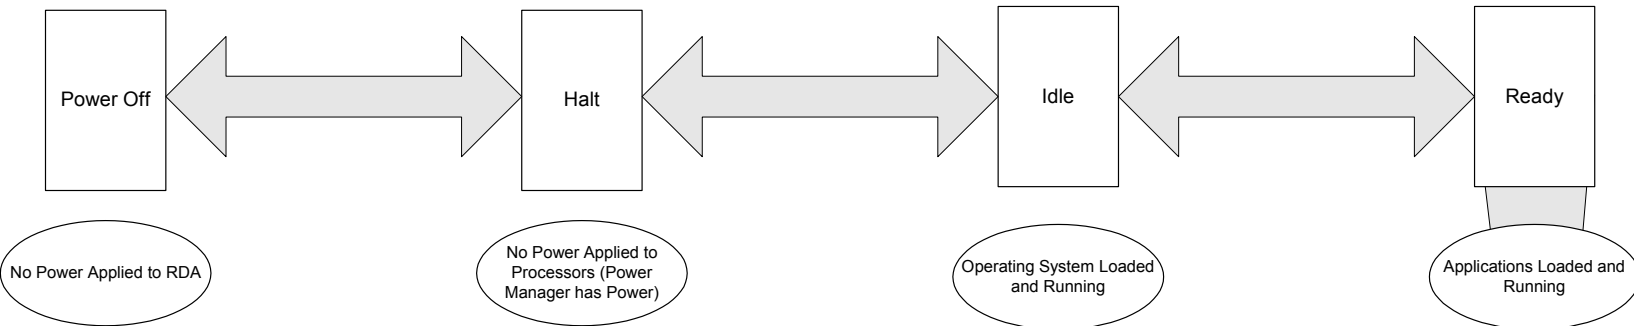

Desired Current	RPG	Master RDA	Remote RDA	RMS	Either
RPG	X	X	X	X	RPG releases
Master RDA	X	X	X	X	Master RDA releases
Remote RDA	X	Master RDA takes	X	X	Remote RDA releases
RMS	X	X	X	X	RMS releases
Either	RPG takes	Master RDA takes	Remote RDA takes	RMS takes	X

Control		Definition
RPG	ICD	This control is defined by the RDA-RPG ICD. This is called “Remote” in the RDA-RPG ICD.
Master RDA	Local	This is the terminal at the RDA (previously known as MMI). This is used to keep any remote users from controlling the system. Local Host allows all functionality of the system.
Remote RDA	RS232 or TCP/IP	Allows remote users to control the system (including MSCF Equipment). Also allows the local terminal (Local Host) to control the system. Analogous to the current “Local” control. In RDA HCI, not all off-line maintenance is possible. Only 1 HCI connection has command authority at a time.
RMS	ICD	Defined by the RDA-RMS ICD.
Either	Local	Control is available to the first device requesting it. No one is actually in control.